



NCA-6.5^{Q&As}

Nutanix Certified Associate (NCA) v6.5 exam

Pass Nutanix NCA-6.5 Exam with 100% Guarantee

Free Download Real Questions & Answers **PDF** and **VCE** file from:

<https://www.pass4itsure.com/nca-6-5.html>

100% Passing Guarantee
100% Money Back Assurance

Following Questions and Answers are all new published by Nutanix
Official Exam Center

-  **Instant Download** After Purchase
-  **100% Money Back** Guarantee
-  **365 Days** Free Update
-  **800,000+** Satisfied Customers





QUESTION 1


When Does AOS automatically Generate a case with nutanix Support?

- A. When disk space usage is high above 90%
- B. On failure of a scheduled NCC check
- C. When losing network connectivity to the CVM
- D. For every alert detected by pulse Diagnostics

Correct Answer: B

QUESTION 2

Refer to the exhibit.

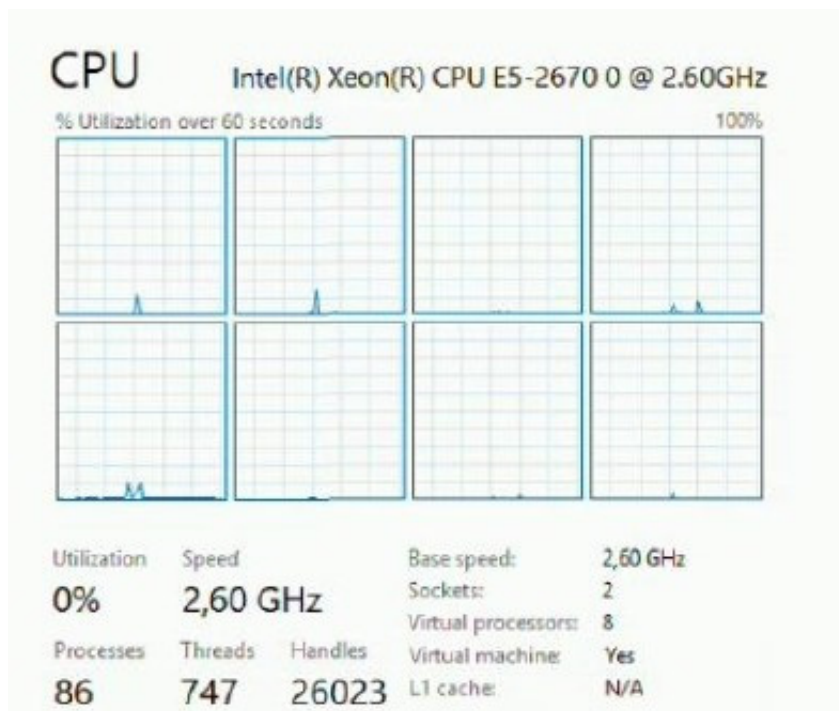

An administrator needs to upgrade a VM to 10 virtual processors. Which action should the administrator take to complete this task?

- A. Power-off the VM and add one vCPU
- B. Update the VM adding two vCPUs
- C. Update the VM adding two cores
- D. Power-off the VM and add one core

Correct Answer: C

**QUESTION 3**

Refer to the exhibit.

What is true about the network uplink ports?

- A. One is connected at 1GbE and the other is 10GbE.
- B. They are configured in Active-Backup mode.
- C. All are connected, but only two are carrying traffic.
- D. They are configured in Active-Active mode.

Correct Answer: B

In Nutanix, all the network uplink ports are connected, but only two of them are carrying traffic at any given time. This is done to provide redundancy and failover in case one of the ports fails. The two ports that are carrying traffic are chosen based on the link aggregation policy configured. The link aggregation policy can be configured to use either Active-Active or Active-Backup mode. In Active-Active mode, both ports are active and carrying traffic, while in Active-Backup mode, only one port is active and carrying traffic, the other port is on standby. Reference: https://portal.nutanix.com/page/documents/details?targetId=Web-Console-Guide-Prism-v5_11:wc-network-configuring-uplink-ports_wc-network-configuring-uplink-ports.html

QUESTION 4

An Administrator needs to provide users access to prism Central Projects.

What Source of user accounts must the administrator Use?

- A. Local Users
- B. Open LDAP
- C. Active Directory
- D. SAML2 Provider

Correct Answer: C

QUESTION 5

What is the maximum jumbo frame MTU supported by host network interfaces and Guest VMs?

- A. 1500 bytes
- B. 2048 bytes
- C. 9000 bytes
- D. 4096 bytes



Correct Answer: C

[Latest NCA-6.5 Dumps](#)

[NCA-6.5 Practice Test](#)

[NCA-6.5 Study Guide](#)